



SENSORS

Product Guide



SENSORS & SAFETY

Datalogic has more than 40 years of experience in the sensors and safety sector, developing their first product, a Photoelectric Sensor, in 1972. Today, Datalogic is one of the largest manufacturers of sensor and safety products worldwide.

Datalogic is the market leader in Italy for photoelectric sensors and safety light curtains, ranking among the top-10 manufacturers in Europe by market share*

Datalogic's Sensors and Safety portfolio solves customer applications in Factory Automation, specializing in Processing and Packaging machinery, and Automated Material Handling Systems related to Manufacturing Industries such as Automotive, Electronics, Pharmaceutical, Food & Beverage, Paper and Printing, Wood-working, Ceramics, Glass, Textiles etc.


Datalogic is also improving and renewing its wide sensor portfolio with new product families and accessories, specifically developed for **IO-Link** connectivity offering a wide solution range for any **INDUSTRY 4.0** application.

**(source: based on VDC 2010 - 2011)*

Tubular, Miniature and Fiber Optic sensors for object detection

Inductive proximity sensors

Fork sensors for label detection

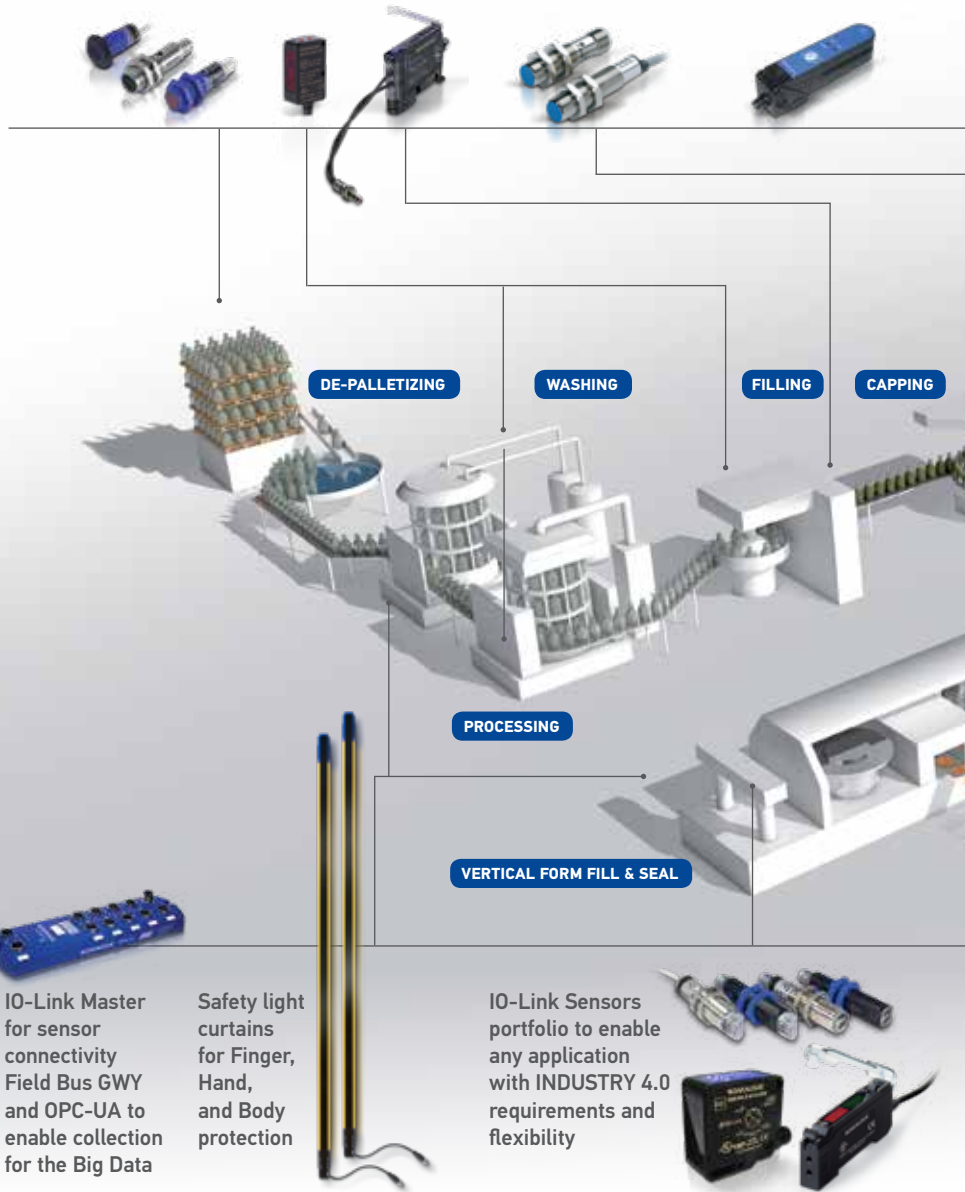


APPLICATIONS

- De-Palletizing
- Washing
- Filling
- Capping
- Labeling
- Case Packing
- Stretch-wrapping
- Palletizing
- Storage & Retrieval
- Cartoning
- Wrapping
- Vertical Form Fill & Seal
- Processing



IO-Link Master for sensor connectivity Field Bus GWY and OPC-UA to enable collection for the Big Data

Safety light curtains for Finger, Hand, and Body protection




IO-Link Sensors portfolio to enable any application with INDUSTRY 4.0 requirements and flexibility



SENSOR PRODUCTS

SENSORS PRODUCT RANGE

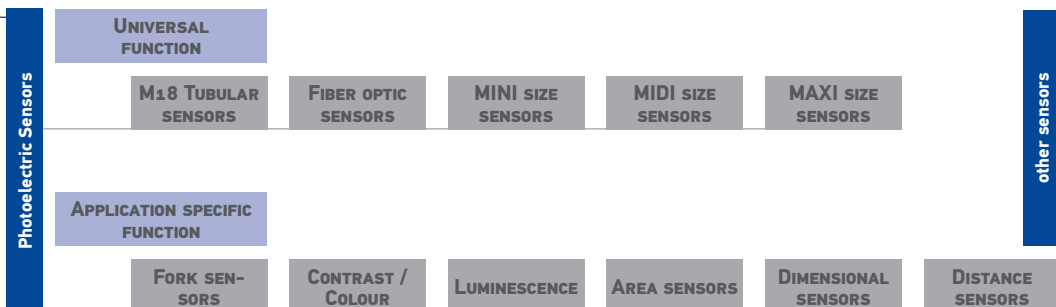

Inductive
Ultrasonic
Capacitive
Temperature

Contrast and Luminescence sensors





Area sensors



Maxi and Compact sensors for object detection



Safety laser scanner for area protection

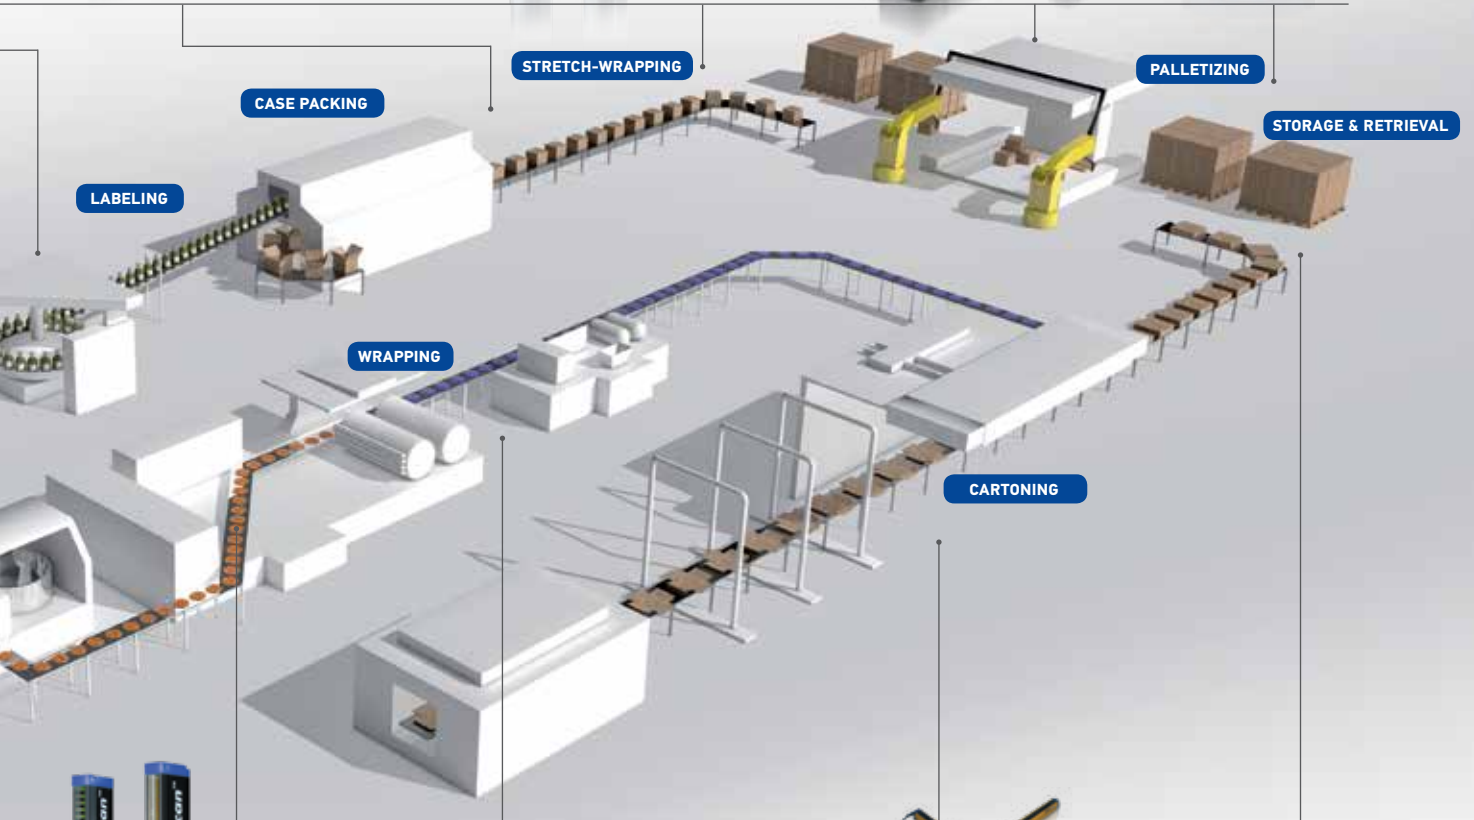

Dimensional sensors for height/width measurement and object positioning



TOF distance sensors for measurement and object positioning



Safety light curtains for body protection with Muting function

SAFETY PRODUCTS

SAFETY PRODUCT RANGE

Safety Light Curtains Type 2 and Type 4	High / Low Resolution	FINGER PROTECTION	HAND PROTECTION	BODY PROTECTION	PRESENCE CONTROL	other safety products	Controller	
	BASE / EXTENDED FUNCTIONALITIES	AUTO / MAN RESTART	EXT DEVICE MONITORING	MUTING	OVERRIDE		BLANKING	Light beam Module
								Relay unit
Safety Laser Scanner	STAND ALONE						Accessories	
	MASTER/SLAVE							

UNIVERSAL PHOTOELECTRIC SENSORS

Subminiature sensors



SM-ALL

The smallest photoelectric sensor with all universal optic functions
Detection of hard to reach objects or in small spaces

Technical data

- Fixed focus proximity 15, 20, 30, 50cm
- Retroreflex 1.5 m and Polarised 1 m
- Through-beam 2 m
- NPN or PNP version with NO-NC outputs
- 4 wires connection with 2m Cable
- IP67 Plastic subminiature case

Applications

- Processing and Packaging machinery
- Electronics assembling
- Small appliance and vending machines

Miniature sensors



S3Z

High performance in standardized miniature housing
Replaces larger sensors and fits in limited space in smaller machinery

Technical data

- Diffuse proximity 15 or 70cm
- Background suppression Red LED or Laser 50-300mm
- Polarised RRR 4 m, Coaxial for Trasp. 2m, Laser 10 m
- Through-beam 15 m and Laser 30 m
- 3 wire connection with 2m Cable or M8 connector
- IP67 Plastic miniature case
- M3 threaded holes on the front side

Applications

- Processing and Packaging machinery
- Electronics assembling
- Small machinery and access control

Miniature sensors



S45

High performance sensor with teach-in regulation and rugged plastic housing
IP69K and Ecolab tested. All-in-one sensor family with LED and Laser emission for easy mounting and installing

Technical data

- RED and Laser emissions
- Precise risk free laser class 1 emission
- Diffused LED proximity 800mm
- Background Suppression 400mm
- Retroreflective Laser 15m / LED 7m
- Through beam Laser 20m / LED 15m
- IP69K housing
- 2m Cable or M8 4 connector version
- PNP or NPN output with remote teach-in input

Applications

- Processing and Packaging machinery
- Cosmetic and Pharmaceutical industry
- Electronics assembling
- Conveyor lines, material handling

APPLICATIONS PHOTOELECTRIC SENSORS

Fork sensors



SR21/SR23

High-resolution, very fast response time
Execution of precise positioning, applying and printing of labels, even when integrated in fast machinery and processes

Technical data

- Slot width 2mm or 5mm and depth 50mm for normal label or booklet label detection
- Up to 20 μ s response time and 25 kHz switching frequency
- IR LED emission for label detection on translucent reel
- Red/Green LED emission for color mark detection
- Auto-Set for teach-in or dynamic threshold setting
- NPN and PNP outputs with M8 4-pole connector
- Compact and robust metal case with IP65 protection

Applications

- Packaging and labeling machinery
- Print and apply systems

Fork sensors



SRX3

High resolution, fast response time
Execution of precise positioning, applying and printing of labels, even with any type/format of labels and bearer tapes, transparent on transparent and metallic ink

Technical data

- Dynamic or static teach models
- Slot size 3mm
- High resolution up to 2mm label gap
- M8 connector with PNP or NPN output
- M12 connector with PNP/NPN output and external teach-in
- Rugged and sturdy aluminium housing

Applications

- Detection of transparent, opaque labels, metallic ink label
- Double sheet detection
- Adhesive surface detection

Contrast sensors



TL46

High resolution, White, Red or RGB emission, very fast response time
Thanks to its new Low jitter models performs very precisely in packaging machinery and synchronization based mark detection, even when used in extremely fast processes

Technical data

- Operating distance 6-12mm (80mm with acc. lens)
- Bright light emission with Red, White, or RGB LED
- Mark/Background automatic, manual and dynamic setting
- Trimmer or Teach-in setting with 4 digit display version
- Very fast switching frequency 15, 20, 25, 30 or 50 kHz
- Very high precision model with less than 7 μ s jitter
- Configurable NPN/PNP and 0-5 V analogue output
- Standard metal case with IP67 protection and IP69K

Applications

- Packaging and labeling machinery
- Food & Bev., Cosmetic, Pharma industry
- Printing machinery

Miniature sensors



S100

Universal Miniature Photoelectric Sensor

Cost saving: best price on the market

Space saving: standard miniature dimension and universal mounting

Time saving: quick and easy mechanical and electrical installation

Technical data

- Through beam 12m
- Retroreflective 7m
- Polarized retroreflective 3m and 5,5m
- Diffuse proximity 30 and 50cm
- Fixed focus 70mm
- Background suppression 100mm
- NPN or PNP output with L/D input
- 2m cable or M8 connector version
- IP67 plastic miniature case
- M3x4 slotted holes on the back side
- M3 threaded holes on the front side

Applications

- Processing and Packaging machinery
- Conveyor lines, material handling
- Automated warehousing

Compact sensors



S8

Extremely high performance

Solves difficult detection applications (i.e. target objects that are too small, too fast, too clear, too shiny)

Technical data

- Background suppression 50-300mm, Laser 20-200mm
- Background suppression for transparent objects with reflective background
- Polarised retroreflective 5m, Laser 10m, Coaxial for transparent objects 2m
- RGB Contrast sensor 6-12mm, 25 kHz switch. freq.
- UV Luminescence sensor 10-30mm, 2kHz switch. freq.
- NO-NC outputs with 2m Cable or M8 connector
- IP 67 Plastic case and IP69K stainless steel version
- Ecolab and Diversey certification

Applications

- Processing and Packaging machinery
- Food and Beverage Industry
- Cosmetic and Pharmaceutical industry
- Electronics assembling

Compact sensors



S62

50x50 Standard universal sensor with improved performance and pricing
Standardization of the same 50x50mm housing, mounting holes, installation and wiring for all optic functions

Technical data

- Diffuse proximity 90 or 200cm, Laser 90cm
- Background suppression 30, 60, 120, 200cm, Laser 15, 35cm
- Retroreflex 13 m, Polarized 8 m, Laser 20 m
- Through beam 25 m
- 10-30 Vdc version with NO-NC, NPN or PNP output
- Multivoltage 24-240Vac/24-60Vdc with Relay output
- 2m cable or M12 rotatable connector

Applications

- Processing and packaging machinery
- Conveyor lines, material handling
- Automotive assembly, intra-logistics

Luminescence sensors



LD46

UV high power emission LED with high sensitivity

Precise packaging machinery synchronization or material sorting and selection based on luminescent "invisible" mark detection

Technical data

- High power UV light emission at 375 nm wavelength
- Operating distance 10-20, 20-40, or 30-50mm
- Teach-in setting and manual threshold adjustment
- 5 segments bar graph for sensitivity level indication
- Fast response time 250 μ s and switching freq. 2 kHz
- NPN and PNP outputs and and 0-5 V analogue output
- Standard metal case with IP67 protection

Applications

- Packaging and labeling machinery
- Food, Cosmetic and Pharma industries
- Ceramic tiles selection and sorting
- Wood working

Area sensors



AS1/DS1

High resolution area sensor

Detection and measurement of small objects crossing the area, even in a random positions

Technical data

- AS1 Area Sensor for small object detection
- DS1 Light Array for small object measurement
- Minimum object detection \emptyset 6mm or flat 0.2x75mm
- Minimum measurement resolution 7mm or 4mm
- Heights ranging from 100mm (16 beams) to 300mm (48 beams)
- Standard distance 2m and Long distance up to 4m
- PNP switching output and 0-10 V analog output

Applications

- Processing and Packaging machinery
- Food, Cosmetic and Pharma industries
- Electronics and mechanical assembly
- Conveyor lines and sorting systems

Dimensional sensors



DS2

Dimensional sensor with extended controlled heights

Set controls based on height or width measurement and object positioning

Technical data

- Measurement light array with IR parallel beams
- Controlled heights from 150 to 2400mm (n x 150mm)
- Standard resolution 25mm, high resolution 6mm
- Standard distance 5 m and Long distance 10m
- PNP switching output with configurable function
- 0-10 V analog output with configurable function
- RS-485 or Ethernet port and Graphic User Interface

Applications

- Secondary Packaging eg. cartons
- Automated vertical warehouses
- Automotive assembly eg. paint shop
- Non-LFT measurement in logistics

Maxi sensors

S300-PA/PR

Heavy duty, multi-voltage sensors with terminal block and internal relay
Durability for integration in outdoor applications and harsh environments



Technical data

- Diffuse proximity 2 m (-PA), 5 m (-PR)
- Background suppression 2 m (-PA), 2.5 m (-PR)
- Polarized retroreflex 7 m (-PA), 22 m (-PR)
- Through beam 50 m (-PA), 60 m (-PR)
- 10-30 Vdc version with NPN or PNP outputs
- Multi-voltage with Relay output and terminal block
- Configurable timing function for turn-ON/OFF delay
- IP67 plastic case, fiber glass reinforced

Applications

- End-of-line packaging, palletizers
- Outdoor or indoor gates control
- Manufacturing plants

M18 tubular sensors

S5N

S5N with its and unique ASIC technology make this M18 family the first tubular sensor family with IO-Link V1.1 and smart sensor profile on the market. S5N sets the technical benchmark for IO-Link connected sensor becoming a reference point for the Industry 4.0.



Technical data

- Diffuse proximity upto 700mm
- Background suppression upto 150mm
- Contrast sensor 10mm ±2 mm
- All the basic optic functions available
- Improved EMI immunity
- Improved ambient light immunity
- M18 flat plastic with universal mounting
- Available in M18 metal housing
- Axial or radial optics, cable or connector
- Standard 4-wire NO-NC NPN or PNP output
- IO-Link V1.1 COM 2 Smart sensor profile

Applications

- Processing and Packaging machinery
- Conveyor lines, material handling
- Ceramics intralogistics
- Automated warehousing

Fiber Optic Amplifiers

S7/S70

High resolution, fiber optic sensor detection of small objects through fiber optic cable, even in confined spaces and high temperature environments. Sensor can be installed at distance far from detection object



Technical data

- Diffuse fiber optics up to 500mm
- Through beam fiber optics up to 1800mm
- Red or White LED emission for contrast detection
- Double 4-digit display
- 4-digit display and teach-in or trimmer setting
- 10 bits (1024 points) or 12 bits (4096 points) resolution
- Switching Freq. 1kHz, Fast 5kHz, Ultra-fast 10kHz and 50kHz
- NPN or PNP output with 2m cable or M8 connector
- I/O link connection

Applications

- Processing and Packaging machinery
- Electronics assembly
- Pharmaceutical industry

Distance sensors

S65-M

Cost Effective Long Range Background Suppressor with Time Of Flight (TOF) technology and Infrared emission



Technical data

- Long Range background suppression detection up to 5m
- Cost effective solution for precise and reliable detection
- Risk-free Infrared LED emission and embedded green LED pointer
- Two independent fully programmable outputs
- NPN/PNP or IO-Link connection models
- Rugged plastic housing in compact 50x50x24 mm format

Applications

- Presence of all medium and large sized objects on conveyors
- Critical object detection in front of problematic background
- Positioning tasks in palletizing
- Position limiter for deck and robot in automotive manufacturing
- Collision prevention limit switch for AGV applications
- Check filling level for liquid and objects

Distance sensors

S85

Long distance sensor based on TOF Accurate controls based on a target object distance and improved cost saving



Technical data

- Time Of Flight (TOF) sensor with Red Laser emission
- Detection and measurement range up to 10 or 20m
- 1mm resolution/repeatability and 7mm accuracy
- 4-20mA or 0-10V scalable analog output and 2 push-pull digital outputs
- RS485 serial interface
- Built-in graphic display and push buttons
- Standard M12 8-poles connector
- IP67 compact metal housing

Applications

- Packaging end of line
- Paper reel unwinding control
- Automated warehousing
- Trans-elevator and crane positioning
- Automotive assembling lines
- Non-LFT measurement in logistics

Vision sensors

DATAVS2

The DataVS2 vision sensor combines the simplicity and robustness of machine vision inspection with effective decoding libraries, creating the ideal entry-level solution for all identification and inspection needs. The sensor can be easily set up with a graphical configuration interface.



Technical data

- Three available versions for efficient **Object Recognition (OBJ)**, **Advanced Object Recognition (AOR)** and **Identification (ID)**.
- Flexible and intuitive configuration via PC via Ethernet
- 20 storable inspections
- 11 types of controls
- 360 ° pattern match for the models advanced
- Logical operators: AND, OR, NOT, NAND, NOR, etc.
- TURBO mode to double the processing speed

Applications

- Packaging and Cosmetic Industries
- Mailing inspections
- Part orientation
- Overprinting inspections
- Check level applications
- Check logo applications
- Barcode & Datamatrix reading

SENSORS ACCESSORIES

Master IO-Link



CBX-IOL-8

This IO-Link Master features an IP67 housing with eight M12 IO-Link ports class B and L-Coded power connectors for harsh environments. This industrial IO-Link gateway has the capability to communicate directly through OPC-UA to the cloud.


Technical data

- Eight M12 IO-Link ports class B to PROFINET or EthernetIP
- Up to eight sensor or actuator connections on a single master
- L-Coded power connectors
- Rugged IP67 housing design
- Direct Sensor IODD handling
- Dual Ethernet ports
- Additional digital input on every port
- Power port sharing capability
- Easy WEB interface for easy setting

Applications

- IO-Link to Field Bus gateway
- Direct interface with HMI and SCADA systems with separate channel from controlling system to ensure extensive data collection
- All manufacturing industries which complies with INDUSTRY 4.0 application requirements

Reflectors



R-SERIES

The Datalogic Automation offer includes different types of reflectors featuring different dimensions and reflection degree. Microprism reflectors are available for laser emission.

Technical data

- Reflector in PMMA plastic
- Support material Support in ABS
- Prismatic Tape for LED and Laser applications
- Micro granular material tape are available
- Mechanical protection IP67
- Operating temperature -30 ... +70°c

Applications

- Retroreflex Laser and LED emitters
- Light Barrier mode detection
- Primary and secondary packaging industries
- Intralogistic and Material handling applications

Fiber Optic Cables



OF/OFA-SERIES

Datalogic offers a wide range of fiber optic cables available in two different lines: OF series for standard applications and OFA series for specialistic applications, such as 90° optics as well as fixed focus optics.

Technical data

- Flexible models
- High temperature models (up to 125 °C)
- Fiber array with parallel beams for proximity or through beam detection
- Fixed focus proximity with axial, radial or lateral optics
- Proximity with 90° optics self-contained
- Focusing, collimating and deviating lenses

Applications

- All possible optical functions for any detection purposes
- Very small application layout
- Very precise object detection
- Long range applications
- Light arrays models

COMPLEMENTARY PRODUCTS

Ultrasonic sensor



US

Distance measurement
Accurate positioning or distance control, immune to object color or light reflection

Technical data

- Square miniature or M18 background suppression with range 5 - 50cm and through beam up to 60cm
- M30 with range 0.2 - 2 m and min object 10mm
- M50 with range 0.2 - 8 m and min object 20mm
- Teach-in push-button and remote teach input
- NPN and PNP switching outputs for object detection
- 0-10 V or 4 - 20 mA analog out for distance measure
- High resolution to 1mm or 0.1% of distance range

Applications

- Packaging machinery
- Beverage and bottling plants
- Paper reel unwinding control

Inductive proximity



IS

Non-contact detection
Cost effective and reliable detection of any metal part

Technical data

- Standard proximity M4, M5, M8, M12, M18, M30
- Double range (i.e. M12 4mm, M18 14mm, M30 20mm)
- Unshielded or shielded models for flush mounting
- Nickel brass or stainless steel short and long housing
- Ecolab and Diversey certifications for industrial detergents
- Multi-voltage, Metal face, Weld field immune models
- NO/NC, NPN or PNP output and programmable versions.

Applications

- Processing and Packaging machinery
- Assembling and conveyor lines
- Metal working and machine tools

OPTICAL ROTATORY ENCODERS



The Datalogic encoder standard industrial line is very effective about price/ performance ratio, high resolution and accuracy. The typical applications can be found in motion control, automated machinery, conveyor lines. The AMT series is also available with the most common modular Fieldbus interfaces, or even Ethernet based integrated Fieldbus interfaces, offering the highest resolution and accuracy for precision motion control and length measurement.

- AMT series multiturn absolute series
- AST series absolute single turn series
- ENC41 low cost and effective incremental series
- ENC58 easy motion control incremental series
- OEK-4 easy belt motion control
- IEP58 programmable encoder series
- MW metric wheels up to 500 mm / 10000 PPR = 0.05 mm per pulse



Rev. 04, 03/2019



9C514800E

Product and Company names and logos referenced may be either trademarks or registered trademarks of their respective companies. We reserve the right to make modifications and improvements.

www.datalogic.com